

iNFINITY

N

DMxxxG12T-B66HSW
695~720W

23.2%

15

30

- 40
- ESG 100%
- ESG



LCOE (BOS




TÜV



- SA 8000
- ISO 9001
- ISO 14001
- ISO 45001
- ISO 50001
- ISO 27001


- IEC 61215, IEC 61730 (IEC TS 63209)
- (IEC 62716)
- (IEC 61701)
- (IEC 60068)
- LeTID (IEC TS 63342)

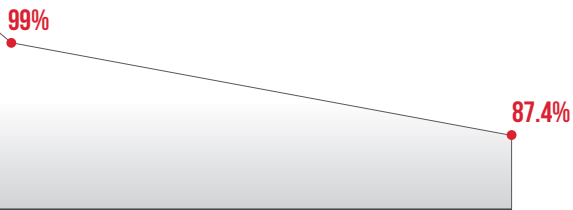

DMxxxG12T-B66HSW



N	132 (6×22)
(mm)	2384x1303x33
(kg)	37.7
2mm	镀膜
2mm	
3	IP68
输出线缆 (含连接器)	4mm ² / : 360mm(+)/200mm(-) : 1400mm(+)/1400mm(-)
PV-ZH202B	MC4-EVO 2A (1500V)



(mm)



1

DM695G12T-B66HSW DM700G12T-B66HSW DM705G12T-B66HSW DM710G12T-B66HSW DM715G12T-B66HSW DM720G12T-B66HSW

(Pmax/W)	
(Imp/A)	
(Vmp/V)	
(Isc/A)	
(Voc/V)	
STC (%)	

¹ IEC 60904-3 : ±4% : ±3% : ±3% : 80%±5%
² STC () : 1000W/m² 25 AM=1.5
³ NMOT: 800W/m² 20 AM=1.5 1m/s



1 (BNPI²)

(W)	695	700	705	710	715	720
(Pmax/W)						
(Imp/A)						
(Vmp/V)						
(Isc/A)						
(Voc/V)						

¹ IEC 60904-3 : ±4% : ±3% : ±3%
² BNPI: 1000W/m² 135W/m² 25 AM=1.5



()	
(V)	
(A)	
(%)	
(Pa)	
(Pa)	



(NMOT)	
Pmax (%/)	
Voc (%/)	
Isc (%/)	



	17.5m
/ (mm)	2440x1140x1420
/	33
/	759

